


XCURVE

SERIE

SUSPENDED/SURFACE

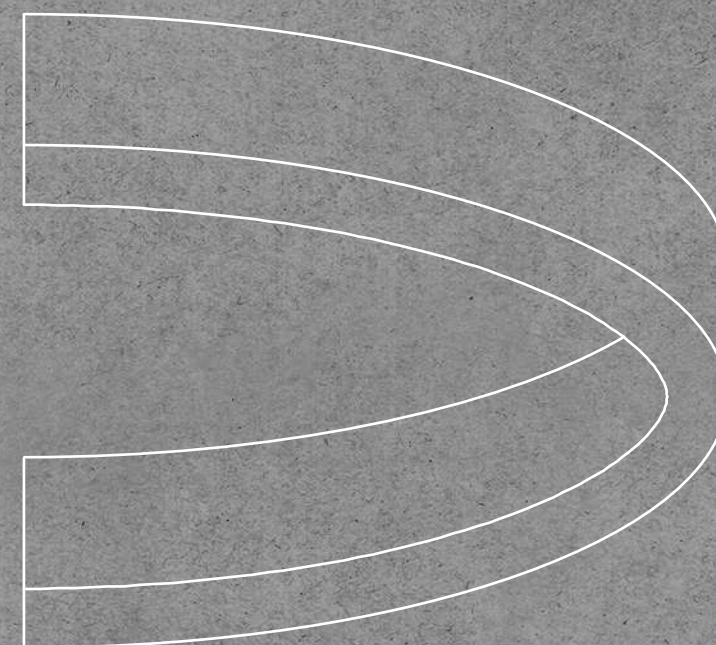

XCURVE SERIE

LED CURVE
SURFACE | SUSPENDED

Inspired in the nature and its organic forms, this special series brings designers a tool to create freely and widely, mixing straight lines with different curves diameters, integrating the luminaries with the architectural and interior design.

Infinitive design possibilities.

Available with direct and indirect lighting.

Perfect to combine with LED rings and panels.

Inspirada en la naturaleza y sus formas orgánicas, esta serie especial ofrece a los diseñadores una herramienta para crear libre y ampliamente, mezclando líneas rectas con diferentes diámetros de curvas, integrando las luminarias con el diseño arquitectónico y de interior.

Infinitas posibilidades de diseño.

Disponible con iluminación directa e indirecta.

Perfecto para combinar con anillos y paneles LED.



XCURVE-CR

LED CURVE/ CURVA LED





PRODUCT FEATURE / CARACTERÍSTICAS

- LED ring in extruded aluminum profile with opal diffuser.
 - For suspended or surface mounting.
 - Direct and direct and indirect lighting (Double emission).
 - Fast and easy connection between curves, with no shadow.
 - Compatible with emergency kit upon request.
 - Options for 0-10V dimming, DALI dimming and color changing driver.
 - Equipped with non-flicking driver and high lumen SMD LED chip.
 - Long lifespan up to 50.000 hours, low maintenance cost.
 - No screws or light leak.
 - High grade aluminum, high quality surface painting.
 - No shadows.
- Application: office, schools, hospitals, supermarkets, shopping mall, hotel, public areas, residences.

TECHNICAL DATA/ DATOS TÉCNICOS

Item No.	Dimension	Power	LED Output	System Output
XCURVE-CR5070-1,5M 1/4	1500*50*70mm(Standard)	20W	3000Lm	1800Lm
XCURVE-CR5070-2,4M 1/4	2400*50*70mm(Standard)	30W	4500Lm	2700Lm
XCURVE-CR5070-3M 1/6	3000*50*70mm(Standard)	36W	5400Lm	3510Lm
XCURVE-CR5070-4M 1/8	4000*50*70mm(Standard)	47W	7050Lm	4230Lm
XCURVE-CR5070-5M 1/8	5000*50*70mm(Standard)	59W	8850Lm	5310Lm
XCURVE-CR5070-1M-LINE	1000*50*70mm(Standard)	30W	4500Lm	2700Lm

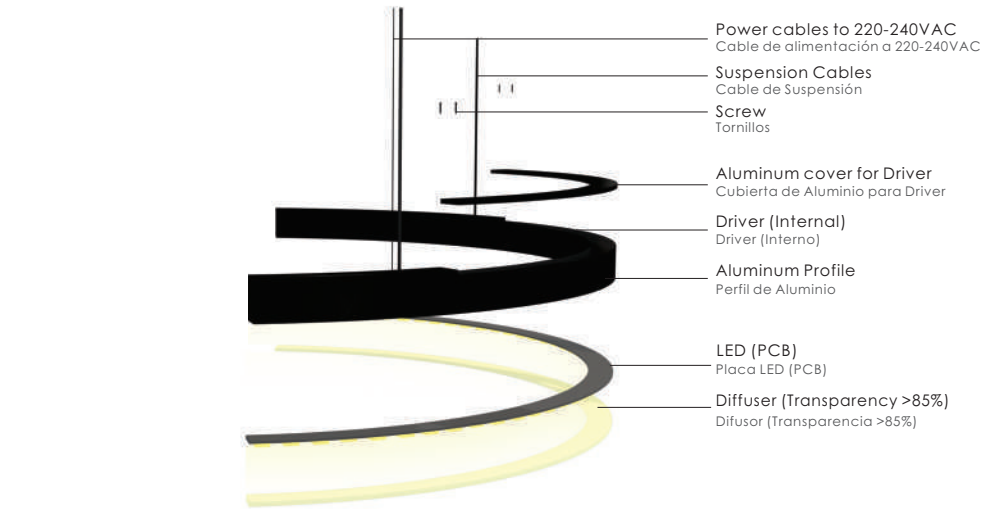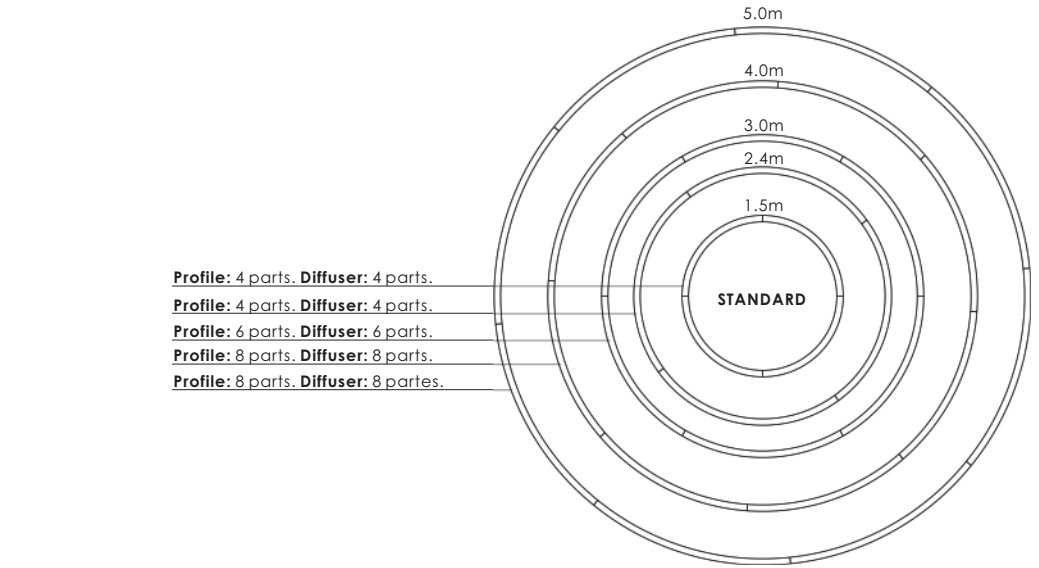

PRODUCT OPTIONS/ OPCIONES DEL PRODUCTO

CCT	3000K 4000K 5000K 6000K
CRI	82+ 90+ 95+
Finish	White Black Silver Custom Color
Dimming	On/off 1-10V DALI Color Changing
Emergency	None 1.5 hours, half power
Sensor	None Motion and daylight sensor


DESIGN POSSIBILITIES

FREE YOUR CREATIVITY/ LIBERA TU CREATIVIDAD


Organic design made possible with curves and straight lines/ Diseño orgánico hecho posible con curvas y líneas rectas.



LUMINARIES USED/ LUMINARIAS UTILIZADAS:
1 XRING-2.400C+ 1 XCURVE-CR5070-1M-LINE + 1 XCURVE-CR5070-3M 1/6 + 1 XCURVE-CR5070-4M 1/8.

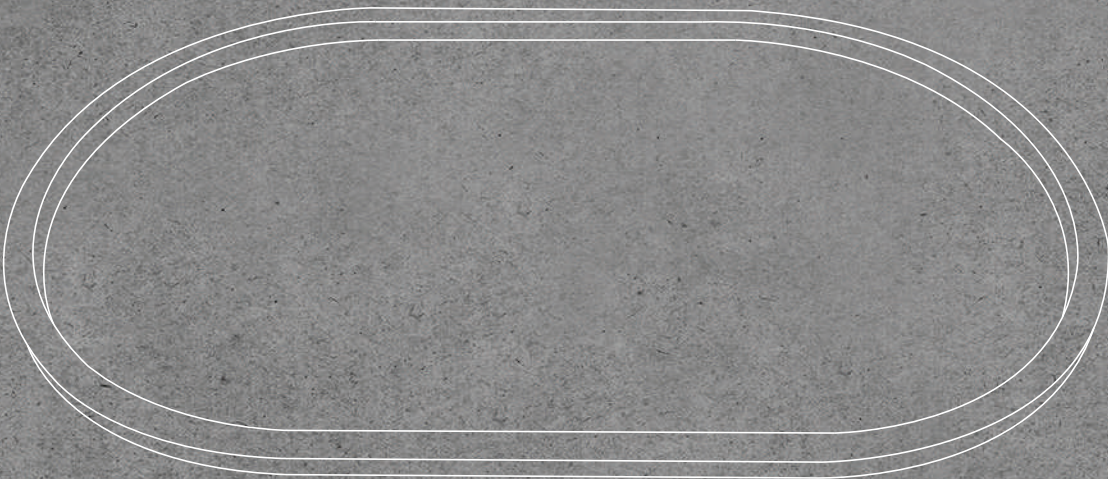

LUMINARIES USED/ LUMINARIAS UTILIZADAS:
4 XCURVE-CR5070-1M-LINE+ 4 XCURVE-CR5070- 2,4M 1/4.

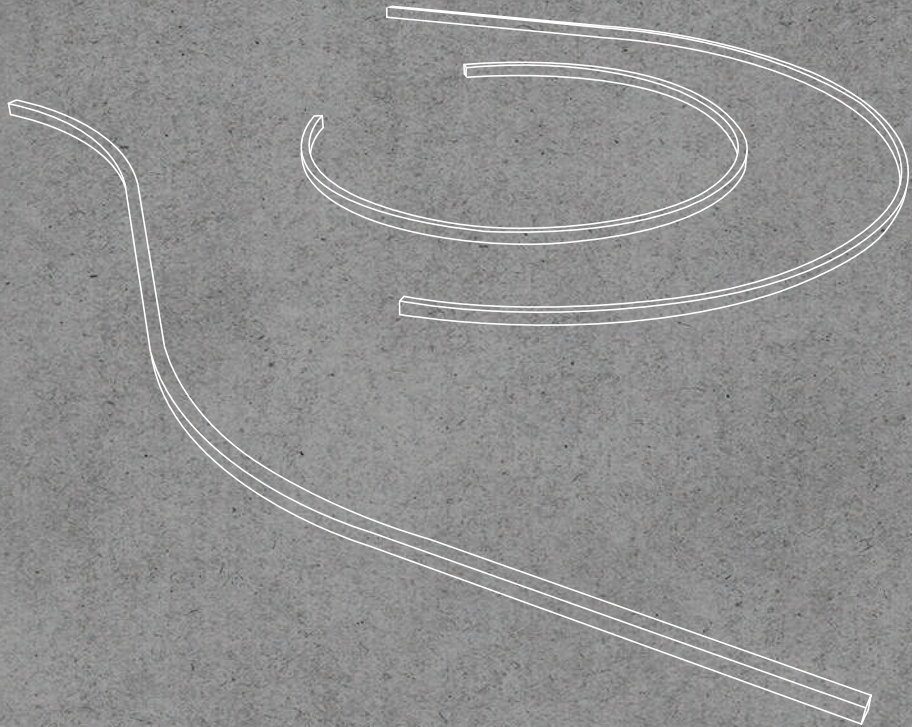

LUMINARIES USED/ LUMINARIAS UTILIZADAS:
6 XCURVE-CR5070-1M-LINE + 5 XCURVE-CR5070-3M 1/6 + 6 XCURVE-CR5070-5M 1/8.



Casa FOA Chile 2019/Interiors Architecture: Icando Design.



BUPA/ Lighting Design: Diseño de Luz.



SURA/ Lighting Design: LEVO Studio/Architecture: OArquitectos.